


## Slim, Miniature Relay, Capable of Relaying Programmable Controller and Temperature Controller Outputs

- Reduced board space, ideal for high-density mounting (45%. (6.5 mm (W) × 17.5 mm (L) × 12.5 mm (H))
- Small, yet switches 5 A at 250 VAC/30 VDC.
- Allows 300,000 operations with a 2A load at 250 VAC or 30 VDC.

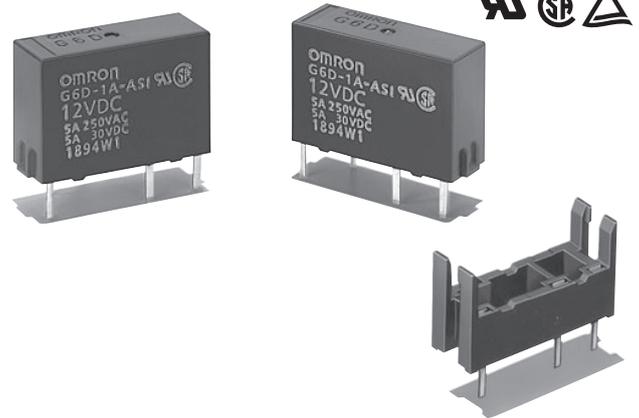

RoHS Compliant

### Model Number Legend

G6D-□□-□□-□□  
1 2 3 4

- Number of Poles**  
1: 1-pole
- Contact Form**  
A: SPST-NO (1a)
- Contact Material**  
ASI: Silver alloy (cadmium-free)
- Contact surface**  
AP: Au plated

### Ordering Information

Enclosure rating	Contact form	Terminal shape	Model	Rated coil voltage	Minimum packing unit
Fully sealed	SPST-NO (1a)	PCB terminals	G6D-1A-ASI	5 VDC	25 pcs/tube
				12 VDC	
				24 VDC	
			G6D-1A-ASI-AP	12 VDC	
				12 VDC	
				24 VDC	

Note. When ordering, add the rated coil voltage to the model number.

Example: G6D-1A-ASI DC5

Rated coil voltage

However, the notation of the coil voltage on the product case as well as on the packing will be marked as □□ VDC.

### Connecting Socket

Applicable relay	Model	Minimum packing unit
G6D-1A-ASI	P6D-04P	25 pcs

### Ratings

#### Coil

Item	Rated current (mA)	Coil resistance (Ω)	Must operate voltage (V)	Must release voltage (V)	Max. voltage (V)	Power consumption (mW)
Rated voltage			% of rated voltage			
5 VDC	40	125	70% max.*	10% min.	160% (at 23 C)	Approx. 200
12 VDC	16.7	720				
24 VDC	8.3	2,880				

Note 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of ±10%.

Note 2. The operating characteristics are measured at a coil temperature of 23°C.

Note 3. The "Max. voltage" is the maximum voltage that can be applied to the relay coil.

\* The must operate voltage is 75% or less of the rated voltage if the relay is mounted upside down.

#### Contacts

Item	Load	Resistive load
Contact Type		Single
Contact material		Ag-Alloy (Cd free) (Ag-alloy (Cd free) and Au plated)*
Rated load		5 A at 250 VAC 5 A at 30 VDC
Rated carry current		5 A
Max. switching voltage		250 VAC, 30 VDC
Max. switching current		5 A

\* The content indicated in parentheses ( ) are for the G6D-1A-ASI-AP

### Application Examples

- Ideal for output applications of control equipments.

### Characteristics

Contact resistance *1		100 mΩ max.
Operate time		10 ms max.
Release time		5 ms max.
Insulation resistance *2		1,000 MΩ min.
Dielectric strength	Between coil and contacts	3,000 VAC, 50/60 Hz for 1 min
	Between contacts of the same polarity	750 VAC, 50/60 Hz for 1 min
Impulse withstand voltage (between coil and contacts)		6 kV (1.2 x 50 μs)
Vibration resistance	Destruction	10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)
	Malfunction	10 to 55 to 10 Hz, 0.75 mm single amplitude (1.5 mm double amplitude)
Shock resistance	Destruction	1,000 m/s <sup>2</sup>
	Malfunction	100 m/s <sup>2</sup>
Durability	Mechanical	20,000,000 operations min. (at 18,000 operations/hr)
	Electrical	
		70,000 operations min. (5 A at 30 VDC, resistive load)
		300,000 operations min. (2 A at 250 VAC, resistive load)
		300,000 operations min. (2 A at 30 VDC, resistive load) (at 1,800 operations/hr)
Failure rate (P level) (reference value *3)		10 mA at 5 VDC (1 mA at 5 VDC) *4
Ambient operating temperature		-25 C to 70 C (with no icing or condensation)
Ambient operating humidity		5% to 85%
Weight		Approx. 3 g

Note. The data given above are initial values.

\*1. Measurement conditions: 5 VDC, 1 A, voltage drop method.


\*2. Measurement conditions: The insulation resistance was measured with a 500 VDC megohmmeter at the same locations as the dielectric strength was measured.

\*3. This value was measured at a switching frequency of 120 operations/min.


\*4. The values indicated in parentheses ( ) are for the G6D-1A-ASI-AP.

## Engineering Data


### Maximum Switching Capacity

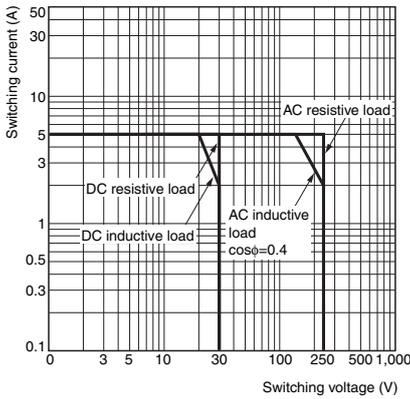

### Durability

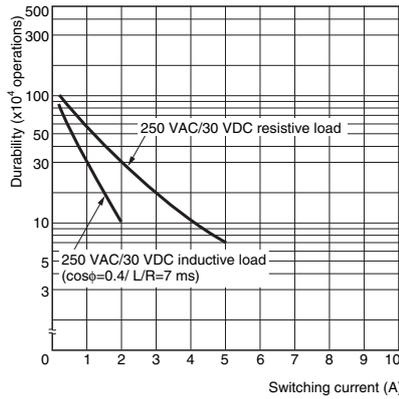


### Ambient Temperature vs. Maximum Coil Voltage

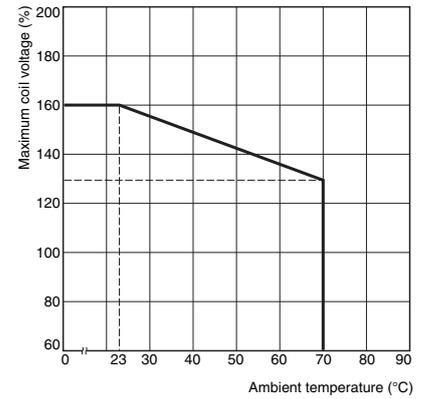


Note. The maximum coil voltage is the maximum voltage that can be applied to the relay coil.

### Ambient Temperature vs. Must Operate and Must Release Voltages

#### G6D-1A-ASI (-AP)

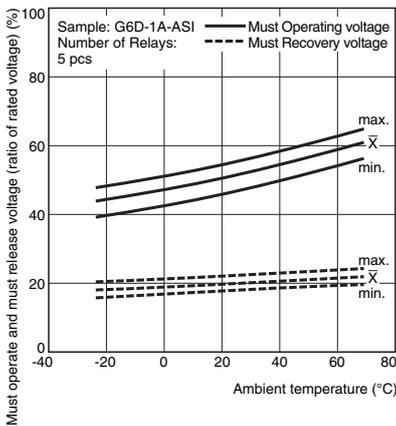


### Shock Malfunction G6D-1A-ASI (-AP)

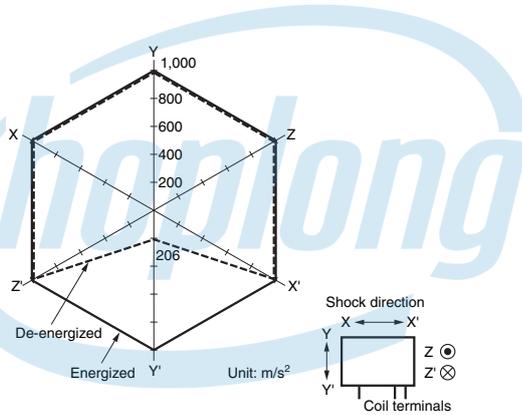


Sample: G6D-1A-ASI 24 VDC  
 Number of Relays: 5 pcs  
 Test conditions: Impose a shock in the ±X, ±Y, and ±Z directions three times each with the Relay energized to check the shock values that cause the Relay to malfunction.

## Dimensions


### G6D-1A-ASI (-AP)

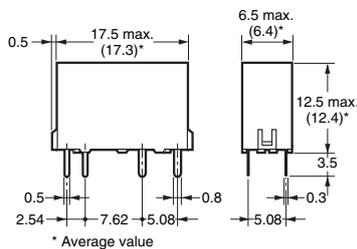

### PCB Mounting Holes (Bottom View)





### Terminal Arrangement/ Internal Connections (Bottom View)




Note: Orientation marks are indicated as follows: □ ⊞

### Socket P6D-04P



### PCB Mounting Holes (Bottom View)



## Approved Standards

The rated values approved by each of the safety standards may be different from the performance characteristics individually defined in this datasheet.

**UL Recognized** (File No. E41515)

Model	Number of poles	Coil ratings	Contact ratings	Number of test operations
G6D-1A-ASI (-AP)	1	5 to 24 VDC	5 A, 250 VAC 40°C	6,000
			5 A, 30 VDC 40°C	

**CSA Certified** (File No. LR31928)

Model	Number of poles	Coil ratings	Contact ratings	Number of test operations
G6D-1A-ASI (-AP)	1	5 to 24 VDC	5 A, 250 VAC (Resistive) 40°C	6,000
			5 A, 30 VDC (Resistive) 40°C	

**ENTÜV Certified** (Registration No. R50167084)

Model	Number of poles	Coil ratings	Contact ratings	Number of test operations
G6D-1A-ASI (-AP)	1	5, 12, 24 VDC	5 A, 250 VAC (cosφ=1.0) 70°C	70,000
			5 A, 30 VDC (0 ms) 40°C	


## Precautions

Please refer to “PCB Relays Common Precautions” for correct use.

### Correct Use

#### Mounting


- More than two relays can be closely mounted right side up as shown in the following illustration.

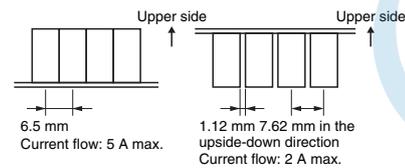

Note. The space between each relay required for heat radiation may vary with operating conditions. Contact your OMRON representative for details.

- Use Surge Killer Diode when switching a DC inductive load in micro load (about 10 to 100 mA). (Carbon deposition may decrease the contact reliability.)

#### Socket Mounting Height



#### Mounting to a P6D

- The P6D is flux-resistant. Do not wash the P6D with water.
- Dismount the relay from the socket before soldering the socket to a PCB.

**INDUSTRIAL AUTOMATION**

· Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.  
· Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

**Note: Do not use this document to operate the Unit.****OMRON Corporation**  
Electronic and Mechanical Components CompanyContact: [www.omron.com/ecb](http://www.omron.com/ecb)Cat. No. K127-E1-04  
0316(0207)(O)