



RATINGS

CONTACT CONFIGURATION




TERMINAL TYPE

TW-101A
Solder Type





TW-101B
Screw Type




OPERATING CHARACTERISTICS

TYPE	TW-101	TW-1012	TW-1014
OF max.	400g	200g	240g
RF min	114g	60g	70g
PT max.	1.6mm	3.5mm	3mm
OT min	0.25mm	1.8mm	1.2mm
MD max	0.65mm	1.6mm	2mm
OP	11.7±0.4mm	14.6±0.8mm	25.3±0.8mm


TW-101A

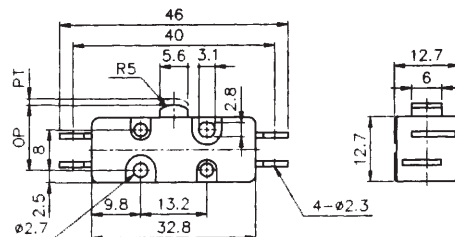


TW-101B

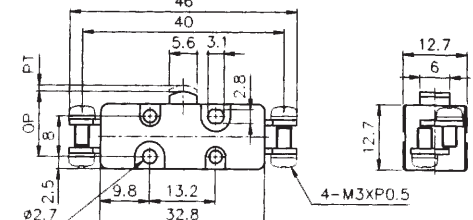


TW-1012A

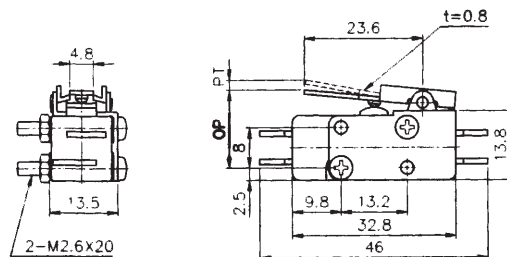

TW-1012B

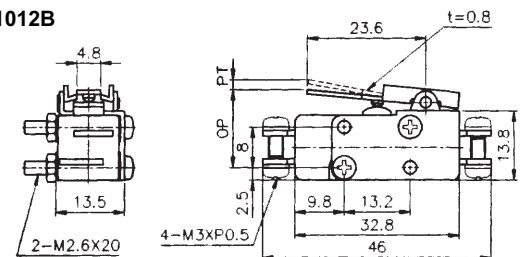

TW-1014A

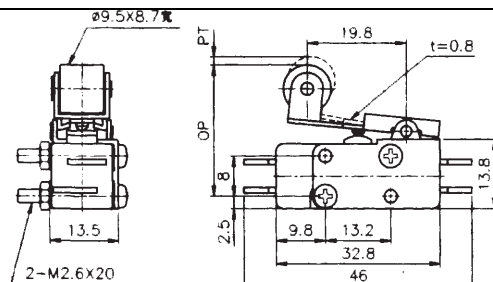

TW-1014B

