

Đèn tháp led nhiều màu

LA6

24V DC

100-240V AC

Φ 60 mm	CE	RoHS 10	UL *	FCC *
KC *	PSE (SA)	IP65	IP54 with Alarm	Indoor Use
Upright Mounting	Ambient Temperature -25~+60	Luminous Color Multi-color (21 colors)	Continuous On	Flashing
Pulse	85dB	11 Sounds		

* 24V model only



*1 Có nhảy ở chế độ thông minh

Sơ đồ chọn mã

LA6-5DLJWB-RYGBC


① ② ③ ④ ⑤ ⑥

① Số tầng 3 = 3 tầng 5 = 5 tầng	② Điện áp A = 100 ~ 240V AC D = 24V DC	③ Lắp đặt / Đầu nối TN = Lắp trực tiếp / Khởi terminal LJ = Cọc thép + Góc lắp / Cáp WJ = Lắp trực tiếp / Cáp	④ Màu thân W = Trắng U = Bạc	⑤ Nhảy / Còi B = Nhảy / Còi N = Không nhảy / Không còi	⑥ Màu đèn* RYG = 3 tầng RYGBC = 5 tầng
---------------------------------------	--	--	------------------------------------	--	--




*Cài đặt ban đầu của nhà sản xuất. Những màu sắc khác có thể chọn được sau khi mua hàng.

Dimensions (mm)

TN Direct mount, Terminal block

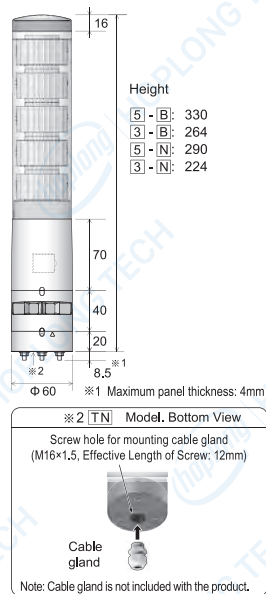


LJ Steel pole, Mounting angle, Cable

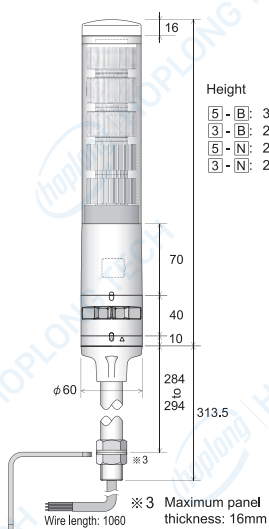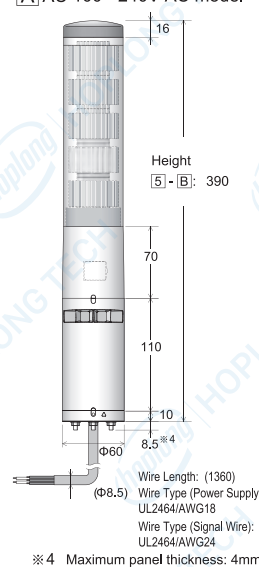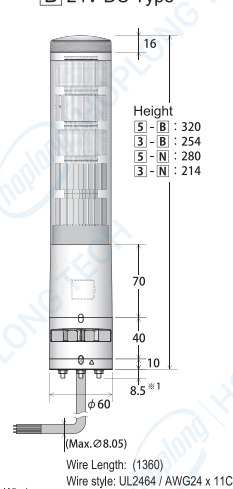WJ Direct mount, Cable
A AC 100 - 240V AC modelWJ Direct mount, Cable
D 24V DC Type


Installation Dimensional Drawing (mm)

TN Direct mount, Terminal block model

WJ Direct mount, Cable model

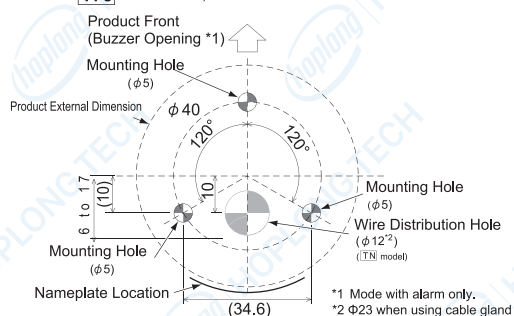

LJ L-Bracket dimensions (included with LJ pole mount model)

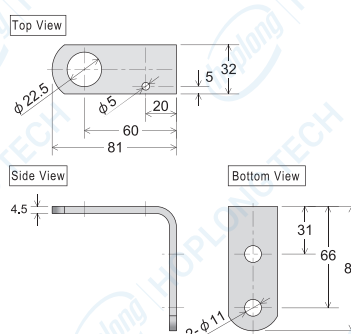

Product List

Model Number	Number of Tiers	Rated Voltage	Mounting Type	Wiring	Function	Alarm	Body Color	Luminous Color	Power Consumption	Mass
LA6-3DWJWB-RYG	3	24V DC	Direct	Cable	Continuous On and flashing	Yes	Off white	Multi-color (21 colors)	4.5W	0.45kg
LA6-3DWJWN-RYG	3	24V DC	Direct	Cable	Continuous On	None	Off white	Multi-color (21 colors)	4.5W	0.40kg
LA6-3DWJUB-RYG	3	24V DC	Direct	Cable	Continuous On and flashing	Yes	Silver	Multi-color (21 colors)	4.5W	0.45kg
LA6-3DWJUN-RYG	3	24V DC	Direct	Cable	Continuous On	None	Silver	Multi-color (21 colors)	4.5W	0.45kg
LA6-3DTNWB-RYG	3	24V DC	Direct	Terminal block	Continuous On and flashing	Yes	Off white	Multi-color (21 colors)	5.5W	0.48kg
LA6-3DTNWN-RYG	3	24V DC	Direct	Terminal block	Continuous On	None	Off white	Multi-color (21 colors)	4.5W	0.42kg
LA6-3DTNJB-RYG	3	24V DC	Direct	Terminal block	Continuous On and flashing	Yes	Silver	Multi-color (21 colors)	5.5W	0.48kg
LA6-3DTNUN-RYG	3	24V DC	Direct	Terminal block	Continuous On	None	Silver	Multi-color (21 colors)	4.5W	0.42kg
LA6-3DLJWB-RYG	3	24V DC	Pole with L-bracket	Cable	Continuous On and flashing	Yes	Off white	Multi-color (21 colors)	5.5W	0.98kg
LA6-3DLJWN-RYG	3	24V DC	Pole with L-bracket	Cable	Continuous On	None	Off white	Multi-color (21 colors)	4.5W	0.93kg
LA6-5DTNWB-RYGBC	5	24V DC	Direct	Terminal block	Continuous On and flashing	Yes	Off white	Multi-color (21 colors)	8W	0.59kg
LA6-5DTNWN-RYGBC	5	24V DC	Direct	Terminal block	Continuous On	None	Off white	Multi-color (21 colors)	7W	0.53kg
LA6-5DTNJB-RYGBC	5	24V DC	Direct	Terminal block	Continuous On and flashing	Yes	Silver	Multi-color (21 colors)	8W	0.59kg
LA6-5DTNUN-RYGBC	5	24V DC	Direct	Terminal block	Continuous On	None	Silver	Multi-color (21 colors)	7W	0.53kg
LA6-5DWJWB-RYGBC	5	24V DC	Direct	Cable	Continuous On and flashing	Yes	Off white	Multi-color (21 colors)	8W	0.56kg
LA6-5DWJWN-RYGBC	5	24V DC	Direct	Cable	Continuous On	None	Off white	Multi-color (21 colors)	8W	0.51kg
LA6-5DWJUB-RYGBC	5	24V DC	Direct	Cable	Continuous On and flashing	Yes	Silver	Multi-color (21 colors)	8W	0.56kg
LA6-5DWJUN-RYGBC	5	24V DC	Direct	Cable	Continuous On	None	Silver	Multi-color (21 colors)	8W	0.51kg
LA6-5DLJWB-RYGBC	5	24V DC	Pole with L-bracket	Cable	Continuous On and flashing	Yes	Off white	Multi-color (21 colors)	8W	1.09kg
LA6-5DLJWN-RYGBC	5	24V DC	Pole with L-bracket	Cable	Continuous On	None	Off white	Multi-color (21 colors)	7W	1.04kg
LA6-5AWJWB-RYGBC	5	100 - 240V AC	Direct	Cable	Continuous On and flashing	Yes	Off white	Multi-color (21 colors)	8W	0.74kg

Thông số kỹ thuật

Các transistor được hỗ trợ	Loại D (24V DC): NPN / PNP Loại A (100-240V AC) PNP
Âm báo động	No.1: 2400Hz peak (âm liên tục) No.2: 2400Hz pippi (0.05 giây bật/ 0.05 giây tắt) No.3: 2400Hz beeping (1.5 giây bật/ 1.5 giây tắt) No.4: 2400Hz beep (0.5 giây bật/ 0.5 giây tắt) No.5: 3600Hz peak (âm liên tục) No.6: 3600Hz pippi (0.05 giây bật/ 0.05 giây tắt) No.7: 3600Hz beeping (1.5 giây bật/ 1.5 giây tắt) No.8: 3600Hz beep (0.5 giây bật/ 0.5 giây tắt) No.9: 2400Hz & 3375Hz pipipip (0.25 giây/ 0.25 giây) No.10: 2400Hz & 3600Hz pipopipo (0.25 giây/ 0.25 giây) No.11: 4000Hz & 4800Hz peepo (0.5 giây / 0.5 giây)
Điều khiển âm lượng	Bốn mức chỉ với một nút ấn (Mặc định của nhà sản xuất là âm to nhất).

Bộ phận tùy chọn

Mô tả sản phẩm	Sản phẩm
Pole mounting assembly	SZ-70L
Pole mounting bracket	SZ-010
Pole mounting bracket	SZ-016A
Wall mount bracket	SZK-003W / U
Pole upper bracket (with waterproof ring and screws)	SZP-004W
Stationary bracket	SZW-060W
Mounting pole (100mm)	POLE-100A21
Mounting pole (300mm)	POLE-300A21
Mounting pole (800mm)	POLE-800A21