


TFT color screens, USB connection, Ethernet port, compact design.

"Anti-drop hooks, screw installation fasteners for one-handed installation, intuitive programming software Vijeo Designer Basic, sliding battery socket for maintenance."

Embedded isolated power supply, PCBA coating to resist to high humidity and polluted environments.

Extensive distribution network.

Vijeo designer basic software.

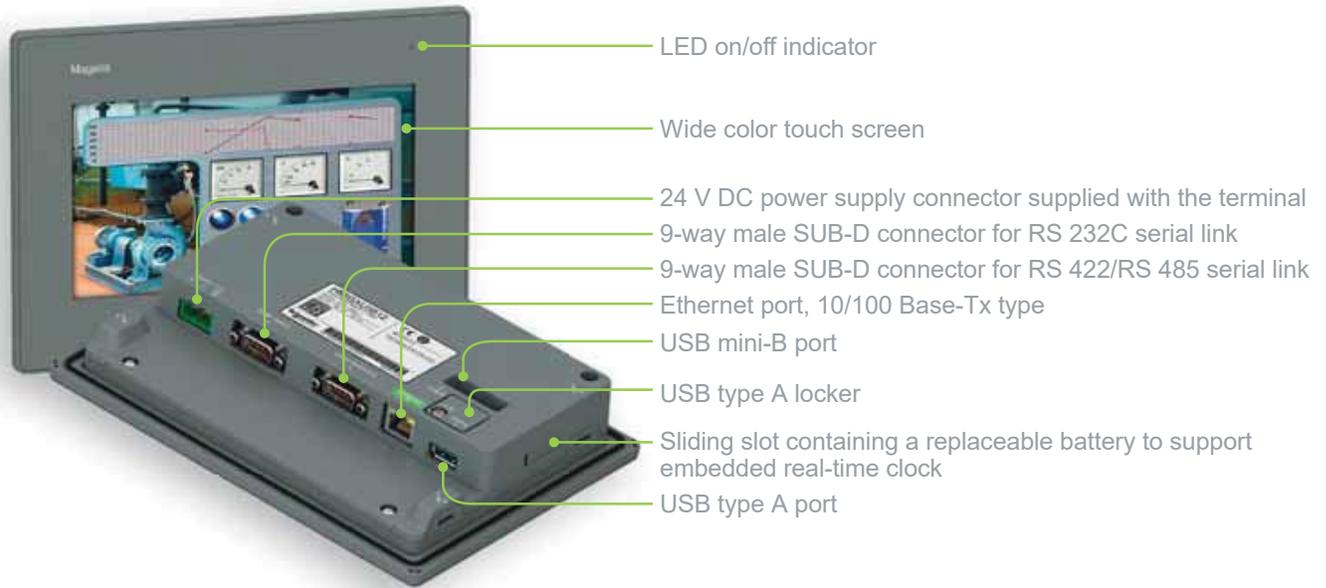

Unit price (incl. VAT) in VND

Features	Magelis Easy GXU Basic		Magelis Easy GXU Universal	
	HMIGXU3500	HMIGXU5500	HMIGXU3512	HMIGXU5512
Screen size	7" wide	10.1" wide	7" wide	10.1" wide
Screen color & Specification	65536 color TFT, WVGA 800 x 480 pixels			
User application memory	32MB		48MB	
DDR memory	128MB		128MB	
USB for downloading	Mini-USB x1			
USB for extension	None		USB type A x 1	
Serial COM1	RS422/485		RS232C	
Serial COM2	None		RS422/485	
Ethernet	None		10/100Base-Tx	
RTC	support (with replaceable battery)			
Operation temperature	0...50 °C			
Storage temperature	-20...60 °C			
Protection level	IP65f			
Standards	CE, RoHS			
Harsh environment	PCBA conform coating			
Installation cut-out (W x H mm)	190x135	255x185	190x135	255x185
Unit price	10,896,600	23,378,300	12,283,700	25,359,400