

Main

Product or component type	Braking resistor
---------------------------	------------------

Complementary

Range compatibility	Altivar Machine ATV320 Altivar Machine ATV340 Altivar Easy 310
Product compatibility	Variable speed drive ATV930 wall mount 0.75 kW 380...480 V light cycle Variable speed drive ATV930 wall mount 1.5 kW 380...480 V light cycle Variable speed drive ATV930 wall mount 2.2 kW 380...480 V light cycle Variable speed drive ATV930 wall mount 3 kW 380...480 V light cycle Variable speed drive ATV930 wall mount 4 kW 380...480 V light cycle Variable speed drive ATV930 wall mount 0.75 kW 200...240 V light cycle Variable speed drive ATV950 wall mount 0.75 kW 380...480 V light cycle Variable speed drive ATV950 wall mount 1.5 kW 380...480 V light cycle Variable speed drive ATV950 wall mount 2.2 kW 380...480 V light cycle Variable speed drive ATV950 wall mount 3 kW 380...480 V light cycle Variable speed drive ATV950 wall mount 4 kW 380...480 V light cycle Variable speed drive ATV930 wall mount 0.75 kW 380...480 V medium cycle Variable speed drive ATV930 wall mount 1.5 kW 380...480 V medium cycle Variable speed drive ATV930 wall mount 0.75 kW 200...240 V medium cycle Variable speed drive ATV950 wall mount 0.75 kW 380...480 V medium cycle Variable speed drive ATV950 wall mount 1.5 kW 380...480 V medium cycle Variable speed drive ATV340 0.75 kW 380...480 V light cycle Variable speed drive ATV340 1.5 kW 380...480 V light cycle Variable speed drive ATV340 2.2 kW 380...480 V light cycle Variable speed drive ATV340 3 kW 380...480 V light cycle Variable speed drive ATV340 0.75 kW 380...480 V medium cycle Variable speed drive ATV320 0.18 kW 200...240 V Variable speed drive ATV320 0.37 kW 200...240 V Variable speed drive ATV320 0.37 kW 380...480 V Variable speed drive ATV320 0.55 kW 380...480 V Variable speed drive ATV320 0.75 kW 380...480 V Variable speed drive ATV320 1.1 kW 380...480 V Variable speed drive ATV320 1.5 kW 380...480 V Variable speed drive ATV320 2.2 kW 380...480 V Variable speed drive ATV320 3 kW 380...480 V Variable speed drive ATV320 0.75 kW 525...600 V Variable speed drive ATV320 2.2 kW 525...600 V Variable speed drive ATV320 1.5 kW 525...600 V

Variable speed drive ATV320 4 kW 525...600 V
 Variable speed drive ATV310 1.5 kW
 Variable speed drive ATV310 2.2 kW
 Variable speed drive ATV310 3 kW
 Variable speed drive ATV310 4 kW

Duty cycle	Light cycle (heavy duty) : 0.8 s braking with 150 % braking torque for a 40 s cycle Light cycle (normal duty) : 0.8 s braking with 120 % braking torque for a 40 s cycle Medium cycle (normal duty) : 4 s braking with 135 % braking torque for a 40 s cycle Medium cycle (heavy duty) : 4 s braking with 165 % braking torque for a 40 s cycle
Average power available	0.1 kW at 50 °C
Ohmic value	100 Ohm
Electrical connection	Terminal, clamping capacity: ≤ 10 mm², AWG 8 for drive
Protection type	Thermal protection via drive
Width	105 mm
Height	295 mm
Depth	100 mm
Product weight	1.5 kg

Environment

Ambient air temperature for operation	0...50 °C
Ambient air temperature for storage	-25...70 °C
IP degree of protection	IP20


Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 1533 - Schneider Electric declaration of conformity Schneider Electric declaration of conformity

<https://hoplongtech.com>

Dimensions

Right Side and Front View

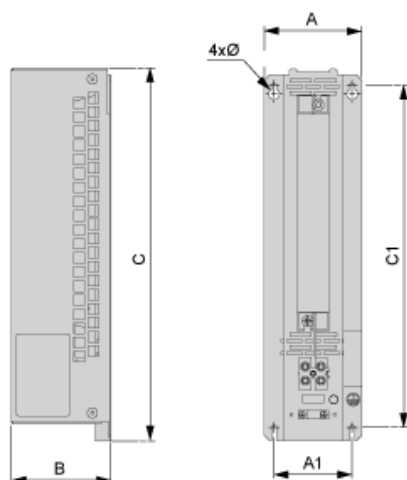

Dimensions in mm

A	B	C	A1	C1	Ø
105	100	295	72	266	4.5

Dimensions in in.


A	B	C	A1	C1	Ø
4.13	3.94	11.61	2.83	10.47	0.18

<https://hoplongtech.com>

Mounting and Clearance




(1) Braking resistor

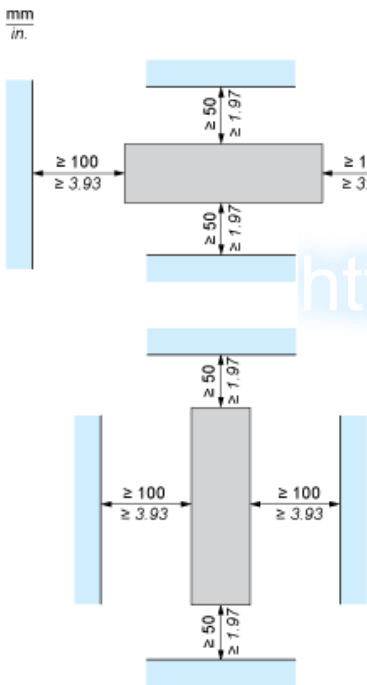

<https://hoplongtech.com>


Recommended Schema

1 Braking Resistor



A1 : Drive or external braking unit
A2 : Braking resistor
PA, PB : DC
T1, T2 : temperature control switch

2 Braking Resistors

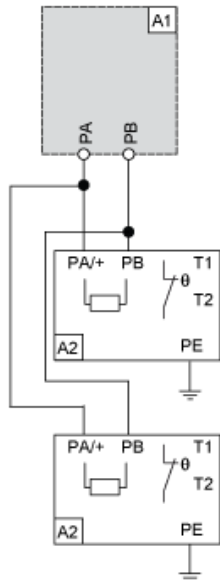

A1 : Drive or external braking unit
A2 : Braking resistor
PA, PB : DC
T1, T2 : temperature control switch



<https://hoplongtech.com>